



FREEDOM SERIES - 2FFL2.6



Progressive Cavity Pump

Performance Curves

Starting Torque: 11.06 ft. lbs.

Stator Hardness = 70° Shore

Data Based on water @86°F

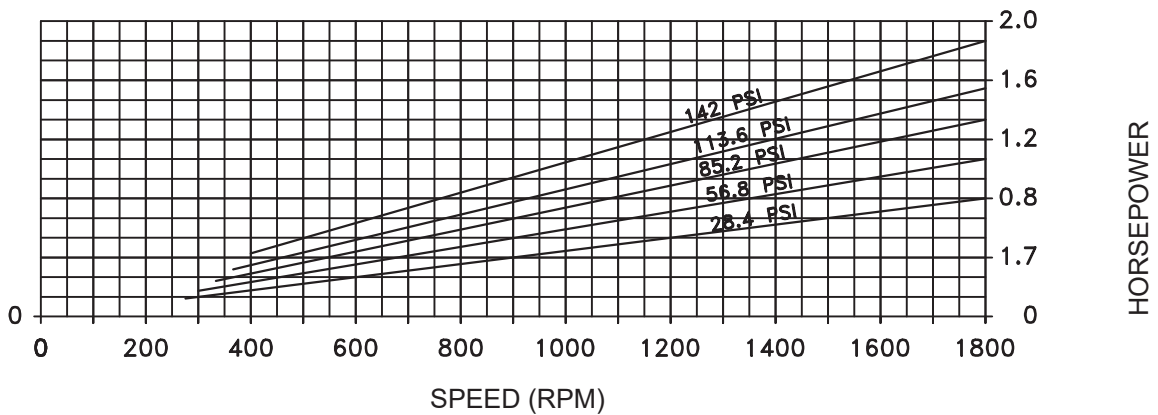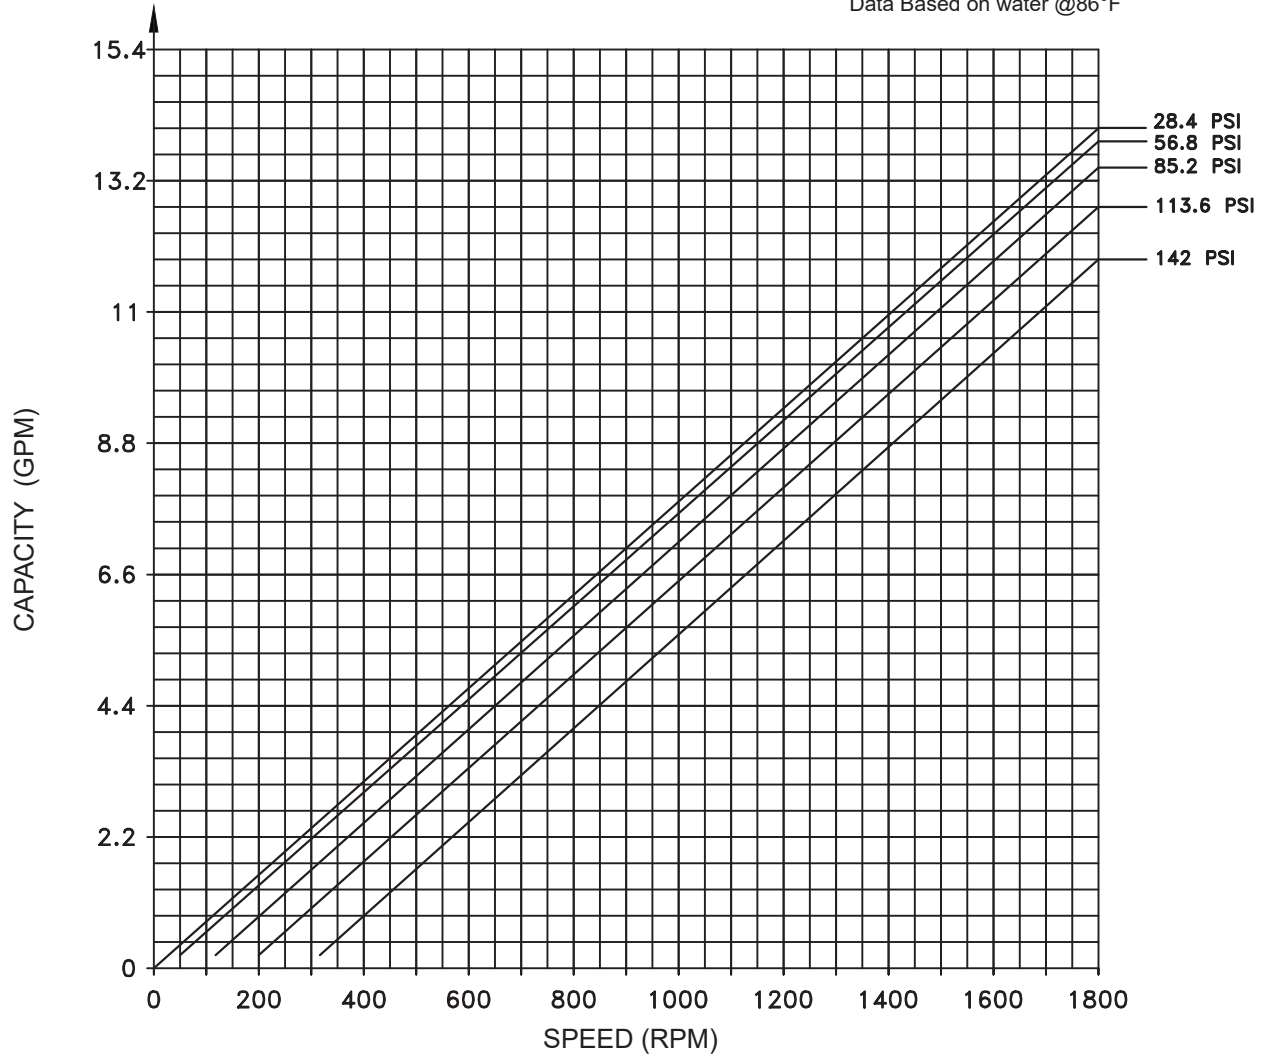

2 Stage Pump

SOLID HANDLING CAPACITY

Soft & Compressable Upto: 0.6299 inches (16 mm)

Hard & Angular Upto: 0.1575 inches (4 mm)

P: 847.640.7867 F: 847.640.7855

2525 Clearbrook Drive Arlington Heights, IL 60005

www.libertyprocess.com